



1.4 F/W 업그레이드 (예시. USB 메모리)

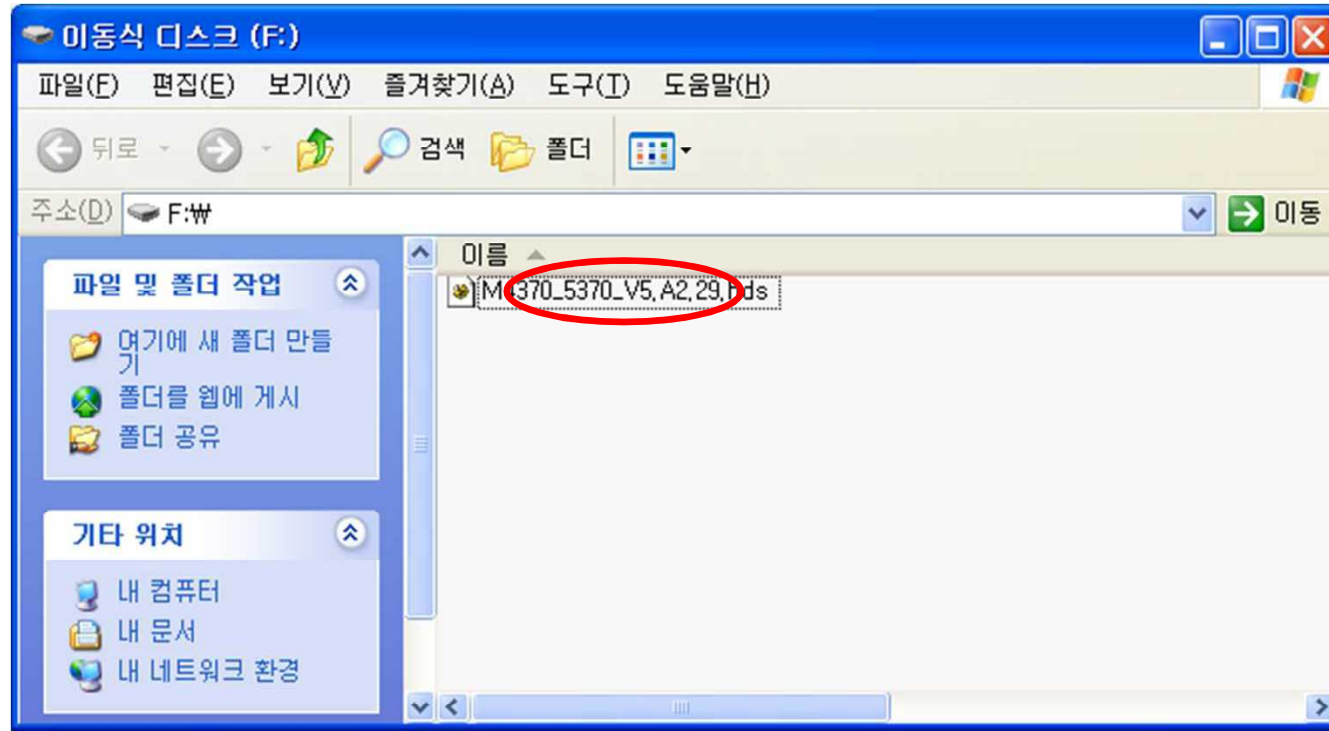


1. USB 메모리에 F/W를 복사한다


1.4 F/W 업그레이드 (예시. USB 메모리)

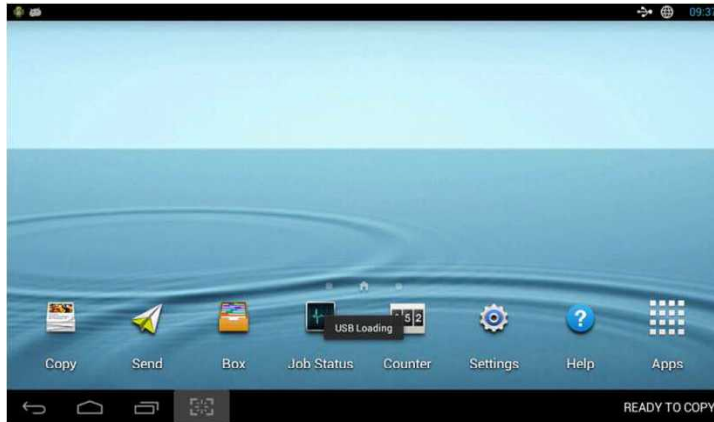

2. 장치에 USB 메모리를 삽입한다

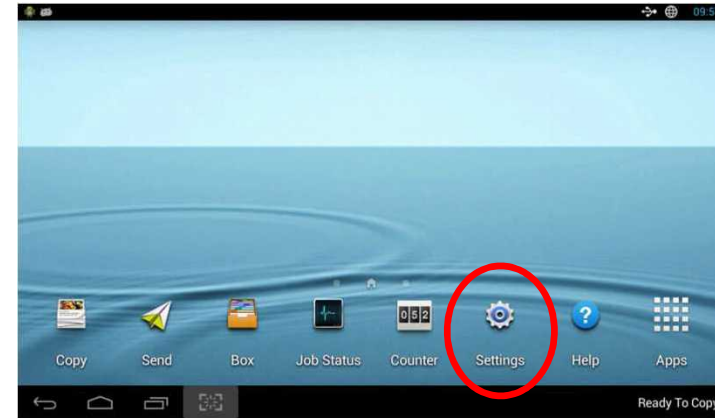

3. 설정을 클릭한다

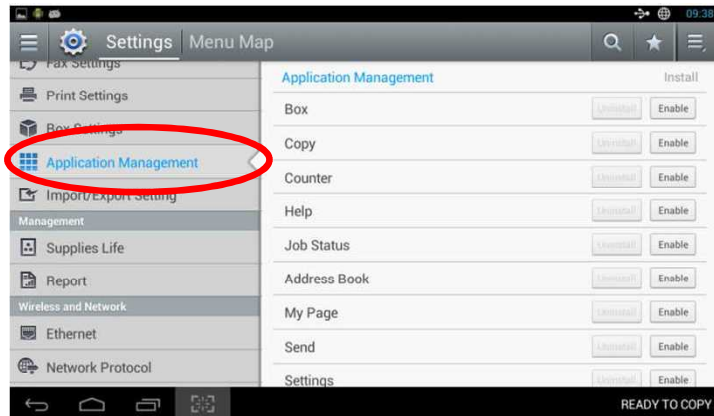

4. 응용프로그램관리를 클릭한다




5. 로그인 (ID/PW)


ID : admin

PW: initial setup시에 입력한 비밀번호


1.4 F/W 업그레이드 (예시. USB 메모리)

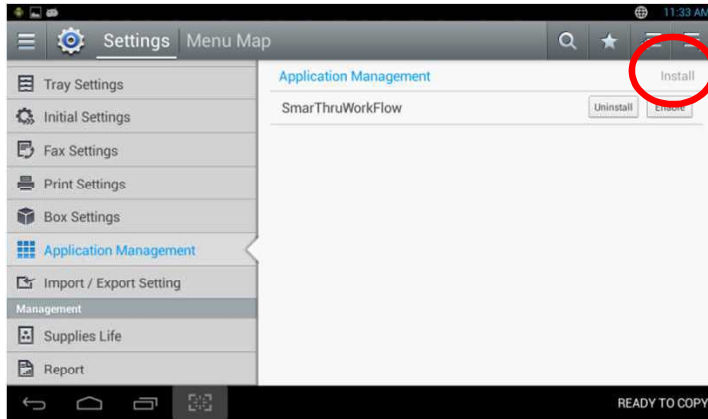


6. 설치를 클릭한다

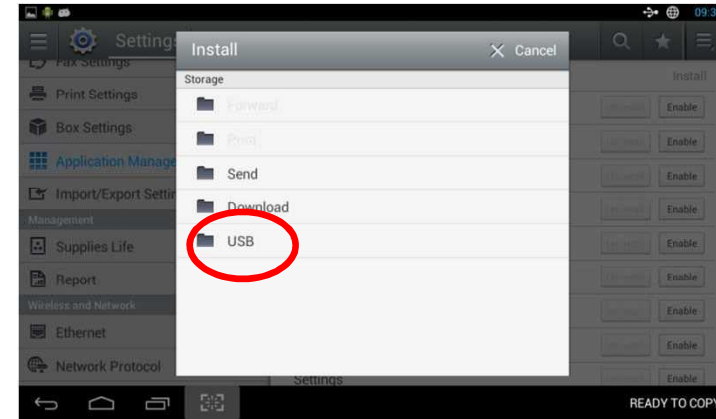

7. USB를 클릭한다

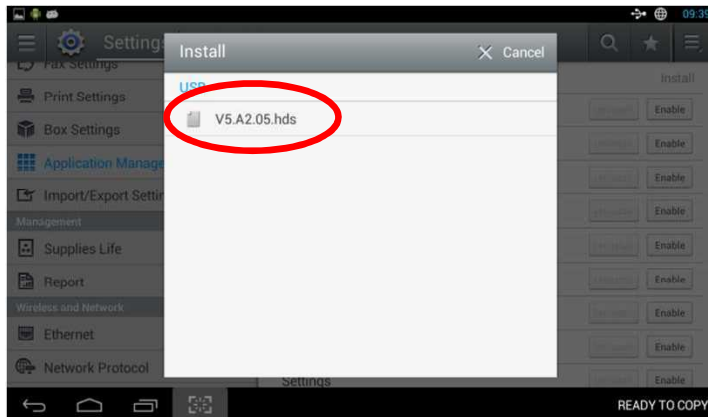


8. F/W파일을 선택한다

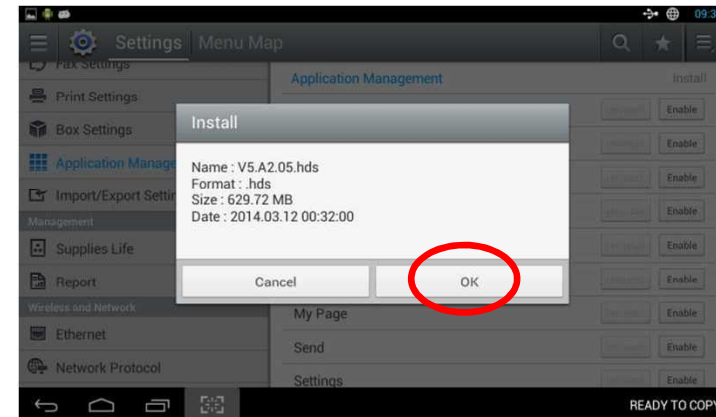


9. 확인을 클릭한다

1.4 F/W 업그레이드 (예시. USB 메모리)

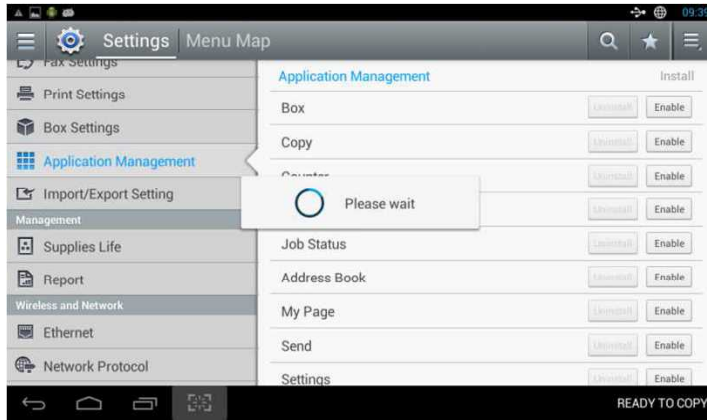


10. 업그레이드 창이 뜰때까지 기다린다

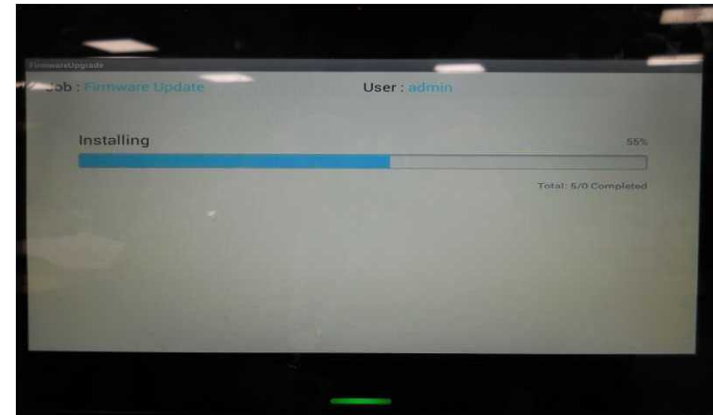

11. F/W업그레이드 진행 상태



12. UI 리부팅 한다.
=>그리고 UI 업그레이드 화면이 표기된다

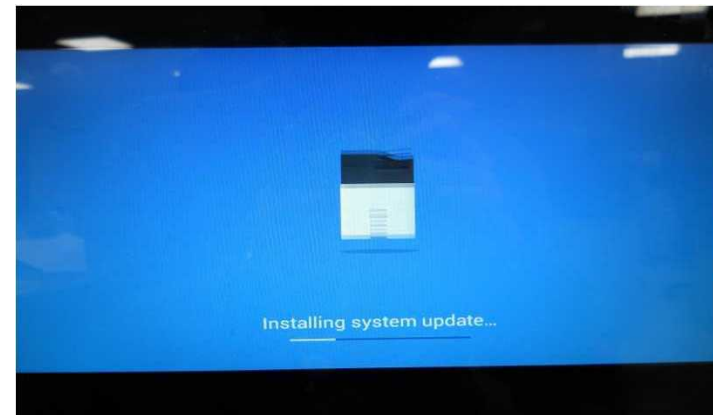

13. UI 업그레이드 진행 화면


1.4 F/W 업그레이드 (예시. USB 메모리)



14. GUI 업그레이드 이후 5분을 기다리면 프린터가 리부팅한다



15. 시스템 초기화 중이다
※프린터가 리부팅 하기전까지 전원을 끄면 안됨.※

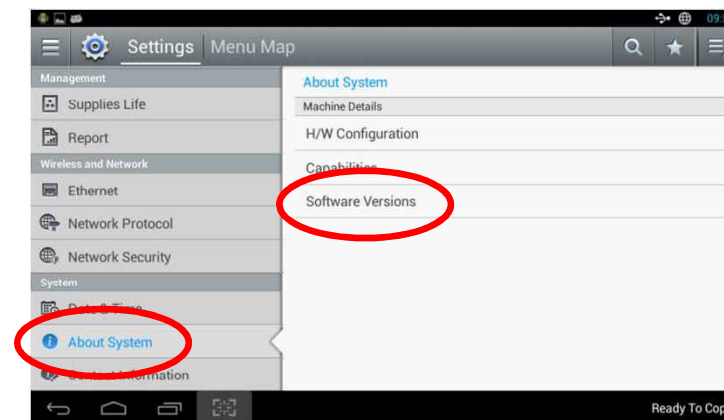

17. 시스템 정보 클릭하고,
=> 소프트웨어 버전 클릭하여 버전 확인

1.4 F/W 업그레이드 (예시. SWS)



1. Printer SWS(Syncthu Web Service)에 접속한다
웹 브라우저에 프린터 주소를 입력한다

Job Status | Direct Print | Eco OFF | Site Ma | **Login** | English

Information | Box | Address Book | Maintenance

Home

Device Information

Status Normal
Alert [0 Alert\(s\) Occurred](#)

Model Name	M4580FX		
Host Name	SEC30CDA71A5055		
Serial Number	9999999999999999		
Interface Type	IPv4 Address	IPv6 Address	MAC Address
Ethernet	192.0.0.192	Not Configured	30:cd:a7:1a:50:55
Location	Not Configured		
Administrator	Name Not configured		
	E-mail Not Configured		
	Phone Not Configured		
Customer Support	Phone Not Configured		

Supplies Information

Toner Cartridge | Imaging Unit

Copyright (C) 1995 Samsung Electronics, All rights reserved. SAMSUNG

2. 로그인을 클릭한다

1.4 F/W 업그레이드 (예시. SWS)



Browser address bar: http://192.0.0.192/sws/index.sws?siteLanguage=en

SyncThru Web Service

Navigation: Information | Box | Address Book

3. Admin ID와 패스워드를 입력한다

Device Information: Status Normal, Alert 0 Alert(s) Occurred

Supplies Information: Toner Cartridge, Imaging Unit

IPv6 Address: Not Configured, MAC Address: 30:cd:a7:1a:50:55

Copyright (C) 1995 Samsung Electronics, All rights reserved.

SyncThru Web Service™

Admin Login Form:

- ID: admin
- Password: [masked]
- Domain: LOCAL
- Buttons: LOGIN, CLOSE

1.4 F/W 업그레이드 (예시. SWS)



SyncThru™ Web Service

SAMSUNG M4580FX

Information Box Address Book Settings Security **Maintenance**

Maintenance

- Firmware Version
- Application Management**
- Backup/Restore
 - Backup
- Link

Application

Selected : 0 | Total : 9

Add Delete Detail Setting

Name	Version	Type	State	Samsung Verified
Address Book	VERSION	Platform	ENABLED	Verified
	VERSION	Platform	ENABLED	Verified
		latform	ENABLED	Verified
		latform	ENABLED	Verified
Counter			ENABLED	Verified
Help	VERSION	Platform	ENABLED	Verified
Job Status	VERSION	Platform	ENABLED	Verified
My Page	VERSION	Platform	ENABLED	Verified
Send	VERSION	Platform	ENABLED	Verified
SmarThruWorkFlow	1.0	Platform	ENABLED	Verified

4. 관리를 클릭한다

5. 어플리케이션 관리를 클릭한다

6. 추가를 클릭한다

1.4 F/W 업그레이드 (예시. SWS)



SyncThru™ Web Service

SAMSUNG M4580FX

Information Box Address Book Settings Security Maintenance

Maintenance

- Maintenance
 - Firmware Version
 - Application Management
 - Backup/Restore
 - Backup
 - Restore
 - Contact Information
 - Link

Application

Selected : 0 | Total : 9

Add

Installation

URL :

Desktop : C:\fakepath\V5.A1.01_PrePV5_V4.hds

7. F/W파일 찾아서 선택한다

OK Cancel

8. 확인을 클릭한다

State	Samsung Verified
ENABLED	Verified
ENABLED	Verified
ENABLED	Verified
ENABLED	Verified
ENABLED	Verified
ENABLED	Verified
ENABLED	Verified
ENABLED	Verified
ENABLED	Verified
ENABLED	Verified

1.4 F/W 업그레이드 (예시. SWS)



SAMSUNG

Installation

Validation Information

Firmware	Version	Model	State
Scan	Same	Matched	Same version installed
UI	Same	Matched	Same version installed
Engine	--	Matched	Updatable
File System	Same	Matched	Same version installed
Boot Rom	Same	Matched	Same version installed
Main	Same	Matched	Same version installed

Overwrite

OK Cancel

9. 덮어쓰기를 선택한다

10. 확인을 클릭한다

1.4 F/W 업그레이드 (예시. SWS)



SAMSUNG

**업그레이드가 끝난 후 프린터는 2,3분 후에 리부팅
한다. 그리고 시스템 초기화 시간 **약 20분 동안 전
원을 끄지 말고 자동 리부팅할때까지 기다려 주세요****